


Part VI. Microstrip Terminations

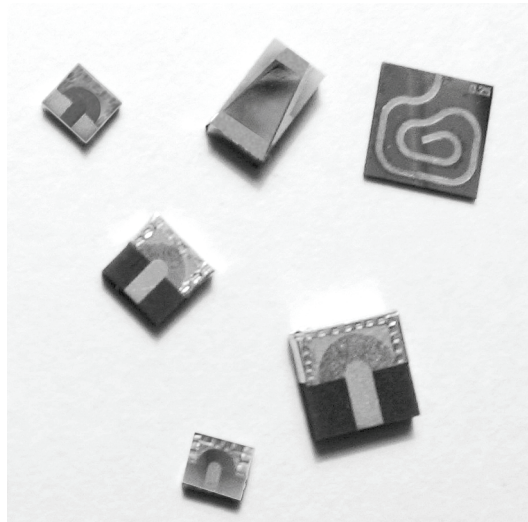

MICROSTRIP TERMINATIONS

(DC – 45.00 GHz)

FREQUENCY (GHz)	MODEL P/N	POWER (Watts)	VSWR	DIMENSIONS. mm			Fig.
				W	L	H	
DC – 4.00	LM-08-2441-01	8		2.4	4.15	1.00	1
DC – 4.00	LM-20-2441-01	20				0.90	
3.00 – 6.00	LM-08-4040-01	8		4.0	4.0	1.00	
	LM-20-4040-02	20					
3.00 – 16.00	LM-02-2220-01	2	1.2	2.2	2.0	0.50	2
	LM-03-2929-01	3		2.9	2.9	0.70	
	LM-06-2220-01	6		2.2	2.0	0.50	
	LM-12-2929-01	12		2.9	2.9		
24.00 – 32.00	LM-05-4545-01			4.5	4.5	0.25	3
	LM-05-2090-01	5		2.0	9.0		
32.00 – 45.00	LM-05-4545-02			4.5	4.5	0.20	

For All terminations nominal impedance $50\Omega \pm 5\%$

